




# MOBILITY 40G

4x4 MIMO 5G Ready Cellular Antenna System with GPS antenna

## Features

- 4x4 MIMO 5G ready cellular antenna system with GPS antenna
- Cellular frequencies 600-6000 MHz
- B71 Support
- Durable and UV-stable housing
- Black or white color options
- IP68 rated

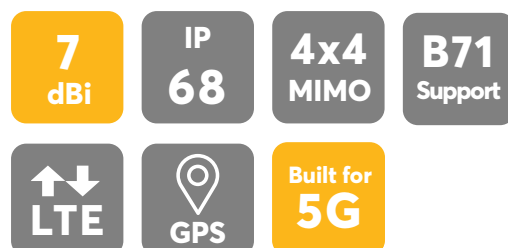

**TAA**   
COMPLIANT

## Overview

<b>Antenna elements</b>	4x LTE, 1x GPS
<b>Cellular frequencies</b>	0.3dBi@ 617-960MHz 5.1dBi@ 1710-2700MHz 5.8dBi@ 3400-4200MHz 7.0dBi@ 4900-6000MHz
<b>Cellular bands</b>	LTE bands B1 to B86 (except B31, B72, B73, B87, B88), 5G bands n1 to n99
<b>GPS frequency bands</b>	1.6dBi, LNA 28dB: 1561-1602MHz
<b>IP rating</b>	IP68
<b>Dimensions</b> (Height) (Diameter)	1.42" / 36mm (spigot not included) 5.12" / 130mm
<b>Coax cable type</b>	CFD-200 (4G/5G, Wi-Fi) RG-174 (GPS)
<b>Connector Type</b>	SMA male, QMA male, N-type male

## Description

The Peplink Mobility 40G is a 5G ready multi-band antenna built for land-based mobile applications. It supports 4x4 MIMO for high bandwidth and solid reliability. It is also 5G ready and supports a wide range of global cellular frequencies. The GPS antenna is equipped with high gain LNA, making it ideal for location tracking.

The Mobility 40G has a solid housing made of UV stable plastic materials. Two color options are available (black and white) to fit different deployments. For easier installation, the antenna comes with different cable length options, available in SMA, QMA or N-type.

## Applications

- Public Safety and mission critical connectivity
- Mobile healthcare
- Transportation Connectivity

## Contact Us

[sales@peplink.com](mailto:sales@peplink.com)

**Find a Peplink Certified Partner**

<https://www.peplink.com/peplink-certified-partners/>

# Mobility 40G



## Specification

### Cellular

Antenna elements	4 elements
Cellular frequencies	0.3dBi@ 617-960MHz 5.1dBi@ 1710-2700MHz 5.8dBi@ 3400-4200MHz 7.0dBi@ 4900-6000MHz
Cellular bands	LTE bands B1 to B86 (except B31, B72, B73, B87, B88), 5G bands n1 to n99
VSWR	< 2.5 over 85% of the band
Feed power handling	10W
Input impedance	50 Ω
Polarisation	Linear
Ground plane	Not required <sup>#</sup>

### GPS

Frequency range	1561-1602 MHz
Peak gain	0.5dBi@1575MHz 1.6dBi@1602MHz
VSWR	< 2.5
Output return loss	10dB max
Gain: LNA	28 ±3dB
Noise figure	1.5dB max at 3.3V
Operating Voltage	3.3V
Power consumption	8.5 ±2.5mA at 3.3V

### Cable

Type	CFD-200
Loss	0.33 dB/m @ 900 MHz 0.49 dB/m @ 2000 MHz 0.55 dB/m @ 2500 MHz 0.87 dB/m @ 5800 MHz
Diameter	13/64" / 5.0mm
Jacket	Half matt PVC, UV resistant
Termination	SMA male, QMA male, N-type male
Type	RG-174
Loss	3.4 dB/m @ 1000 MHz 4.9 dB/m @ 1800 MHz
Diameter	0.1" / 2.7mm
Jacket	Half matt PVC, UV resistant
Termination	SMA male, QMA male, N-type male

# Mobility 40G

### Mounting

Supported types	Panel, wall, pole
Mounting hole	1 11/16" / 43mm
Max panel thickness	19/32" / 15mm

### Mechanical

Product dimensions (Height) (Diameter)	1.42" / 36mm (spigot not included) 5.12" / 130mm
Packaged dimensions	8.90" x 8.46" x 4.29" / 226 x 215 x 109mm
Radome material	UV stable PC+ABS

### Package contents

Antenna	Mobility 40G
Mounting	Mounting bracket Double sided 3M adhesive pad Diameter: 5.08" / 129mm Thickness: 0.08" / 2mm

### Environmental, compliance

Cable flammability	UL 758 (VW-1)
Compliance	RoHS, REACH & WHEE
Enclosure flammability	UL 94 HB
IP rating	IP68
Operating temperature	-40° - 176°F / -40° - 80°C
Storage temperature	-40° - 176°F / -40° - 80°C
Salt Spray	MIL-STD 810F/ASTM 8117
UV resistance rating	UL 746C (F1, long-term UV exposure)
Wind Survival	235mph (379km/h)*

<sup>#</sup>All measurements stated in this document were obtained without a ground plane.


\*Simulations using CATIA FEM (Finite Element Method ) have shown that the Peplink Mobility 40G antenna can withstand wind speeds of up to 235mph (379km/h). However, installation under such extreme conditions require professional installation and adherence to additional safety measures consistent with industry best standards and practices to ensure the antenna remains securely in place and does not become detached. For high-wind environments, standing mounting methods such as the plastic nut or L-mount are not sufficient. The antenna must be flush mounted, securely glued and installed using special fixation components specifically designed to hold it firmly under heavy wind loads.



<sup>#</sup>All measurements stated in this document were obtained without a ground plane.


Ordering information

Mobility 40G

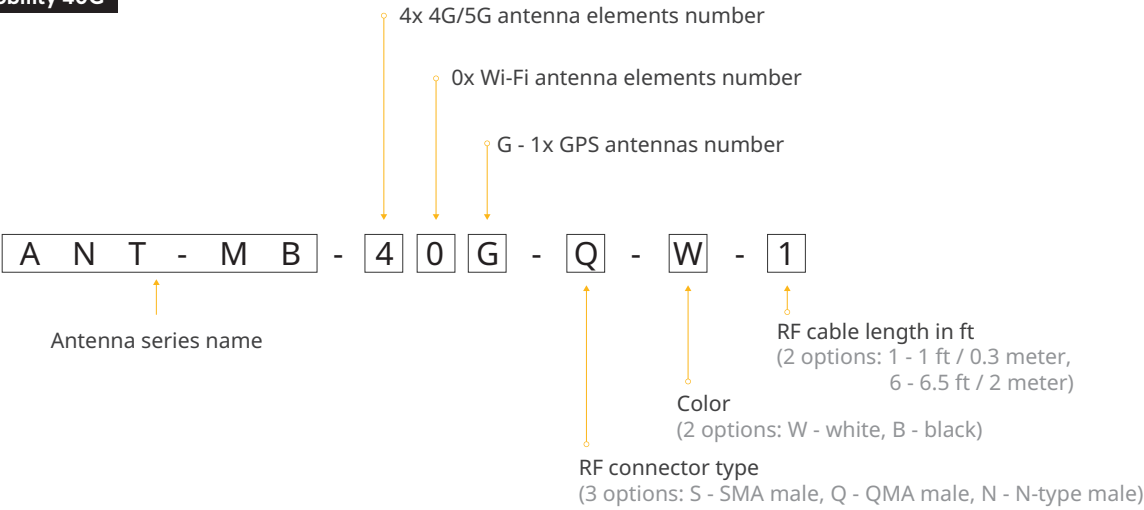


Mobility 40G

Extension cable

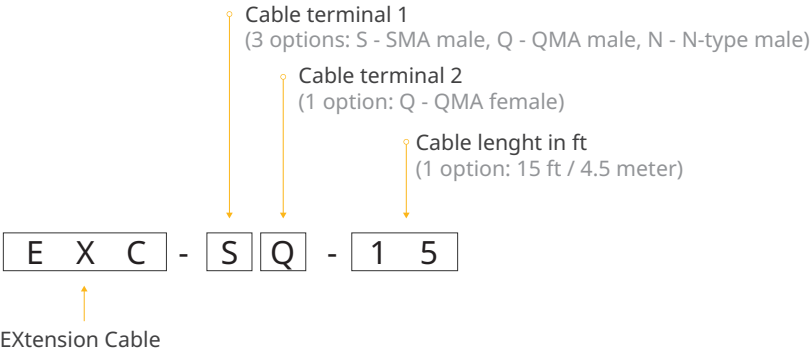

LTE/GPS elements

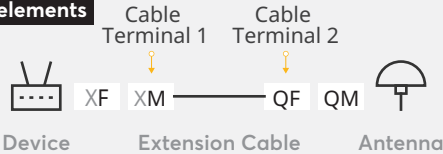


Product Code	Element type	Description
EXC-SQ-15	LTE/GPS elements	Extension coax cable, SMA male to QMA female connector, 15ft / 4.5m
EXC-QQ-15	LTE/GPS elements	Extension coax cable, QMA male to QMA female connector, 15ft / 4.5m
EXC-NQ-15	LTE/GPS elements	Extension coax cable, N-type male to QMA female connector, 15ft / 4.5m


Technical drawing

(unit: mm)


Antenna

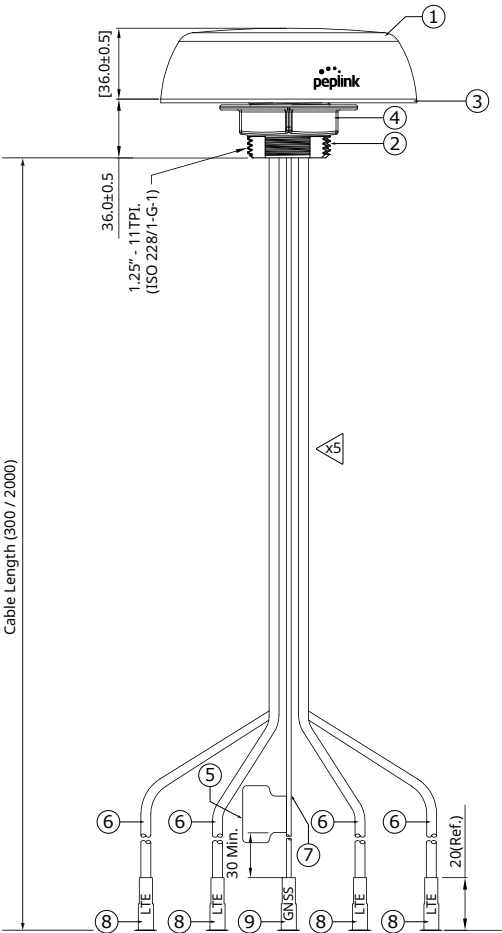


SMA Male

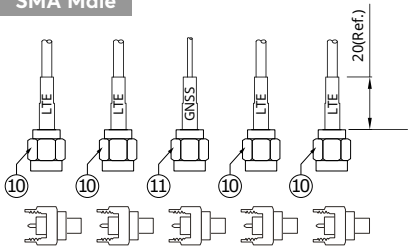

QMA Male

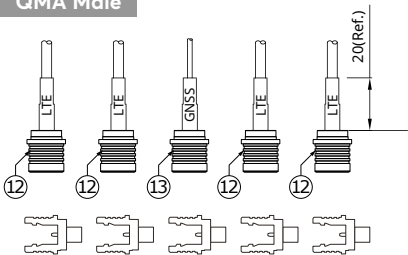


N-Type Male

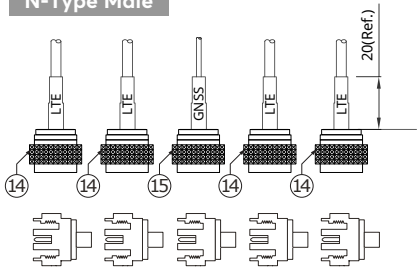

Index


No.	Description	Qty
1	Antenna top cover (PC+ABS)	1
2	Antenna bottom cover (PC+ABS)	1
3	Double sided 3M adhesive pad	1
4	Hexagon NUT (PC+ABS)	1
5	Label	1
6	Cable CF200 (4G/5G)	4
7	Cable RG-174 (GPS)	1
8	LTE/5G H.S. tube	4
9	GPS H.S. tube	1
10	LTE/5G antenna connector (SMA male)	4
11	GPS antenna connector (SMA male)	1
12	LTE/5G antenna connector (QMA male)	4
13	GPS antenna connector (QMA male)	1
14	LTE/5G antenna connector (N-Type male)	4
15	GPS antenna connector (N-Type male)	1

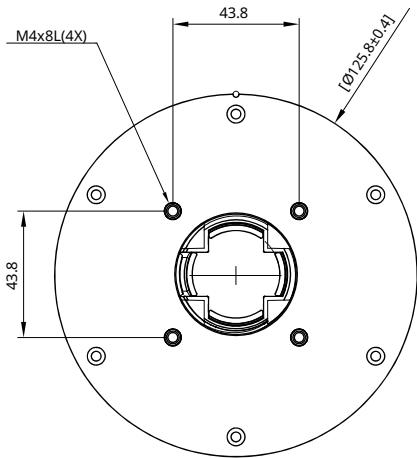




## Technical drawing


(unit: mm)

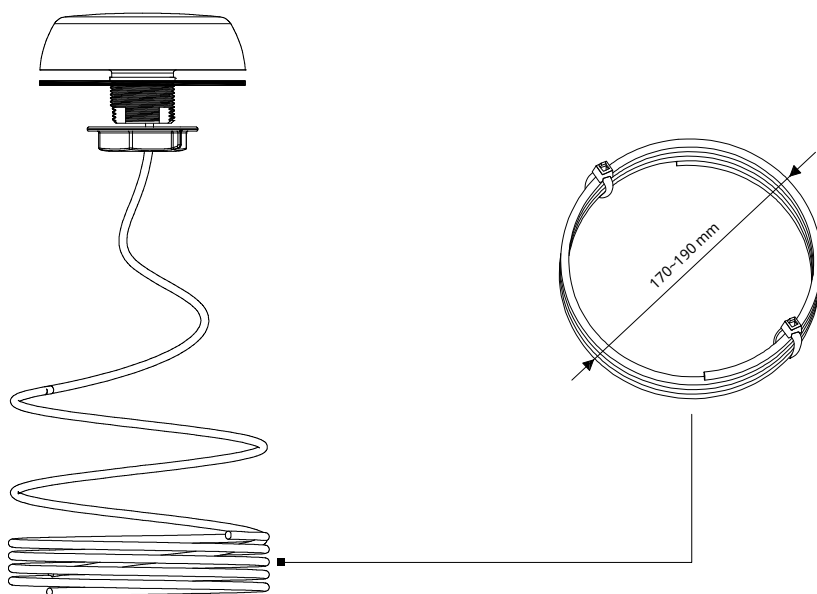

### Mounting Set

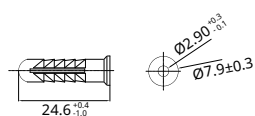


Plastic fixing for M3.5 screw  
(2 pcs)





Tapping screws  
(2 pcs, M3.5\*24L)




Screws  
(4 pcs, M4\*15L)




Mounting bracket

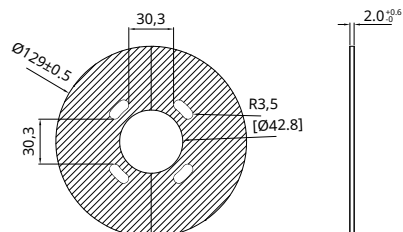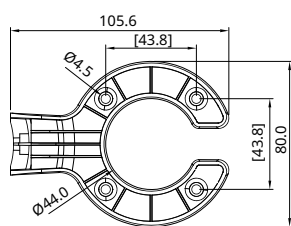


Double sided 3M adhesive pad

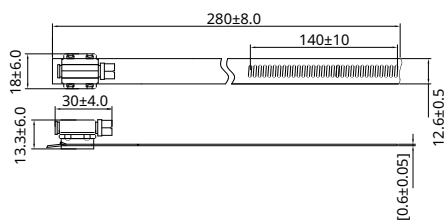


Hose clamp




## Cellular Antenna VSWR

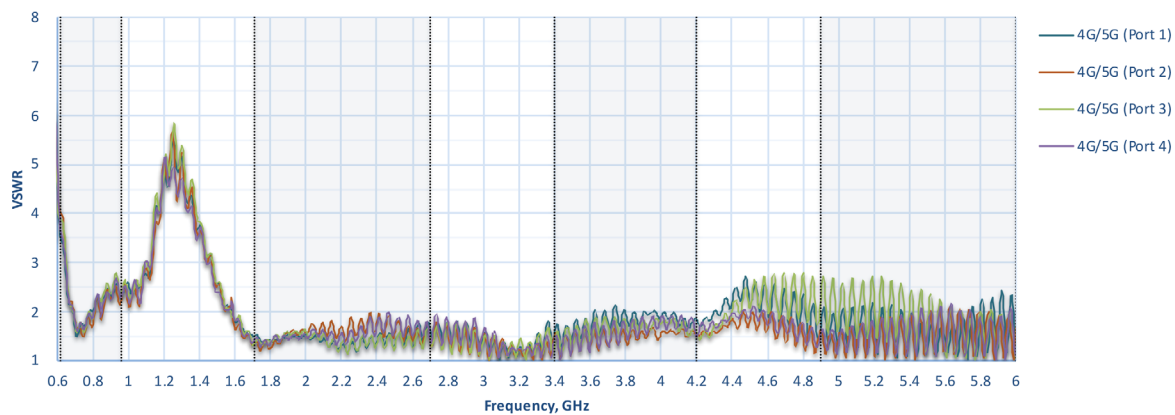


## Cellular Antenna Gain

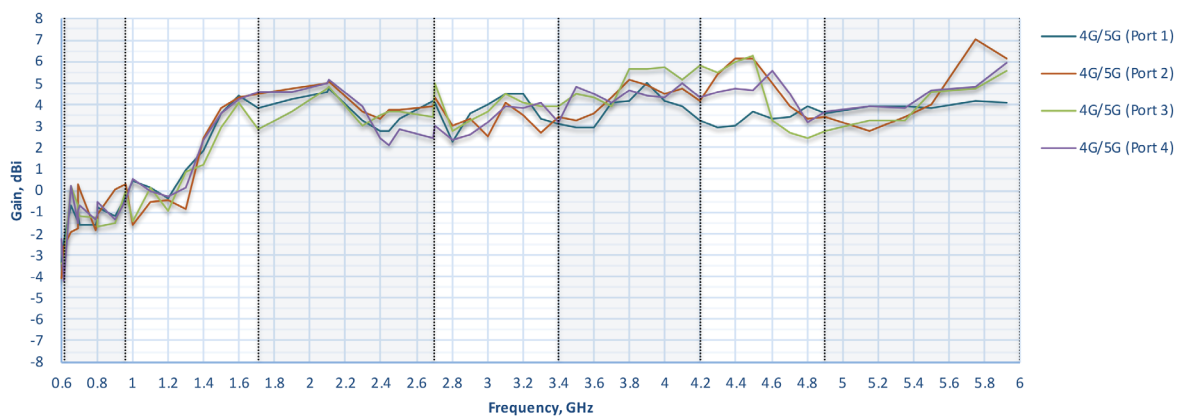

## Cellular Antenna Isolation

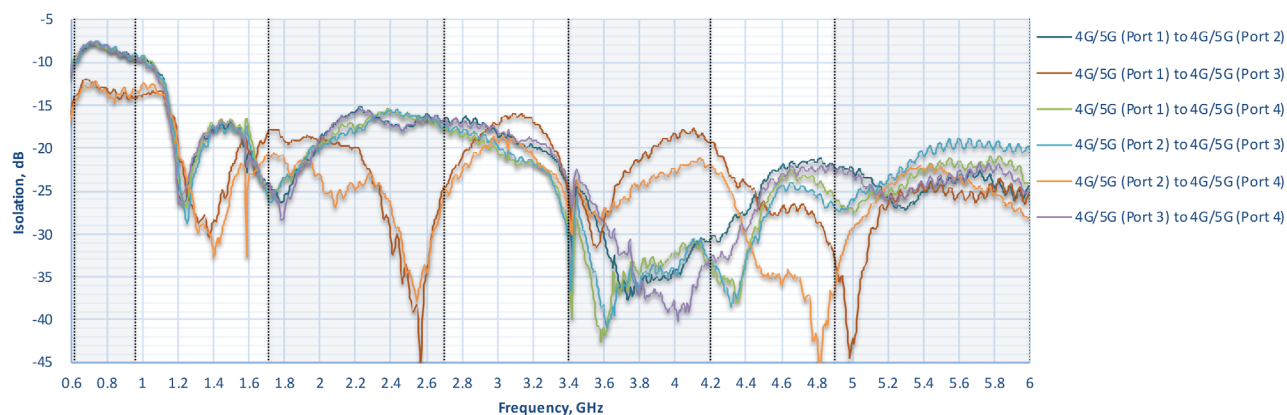


## Cellular Antenna Efficiency

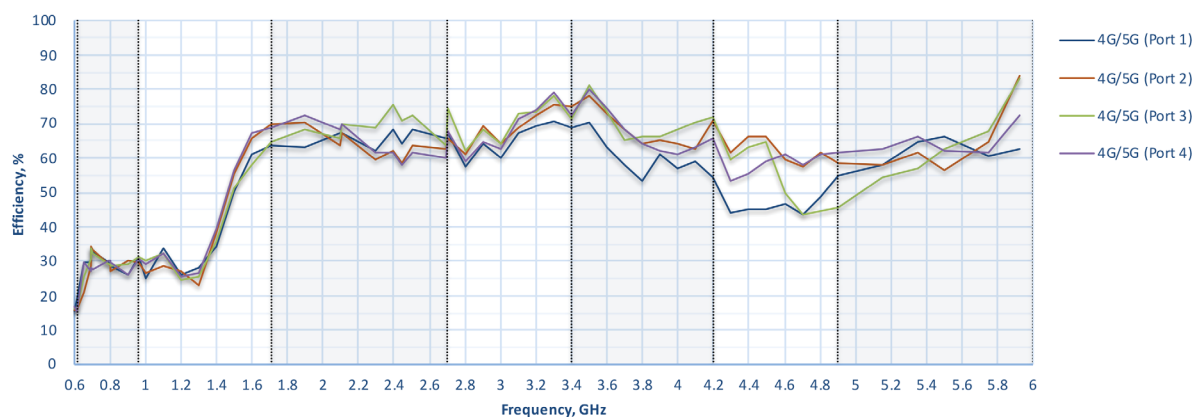




## Radiation patterns (Azimuth)


617-960 MHz

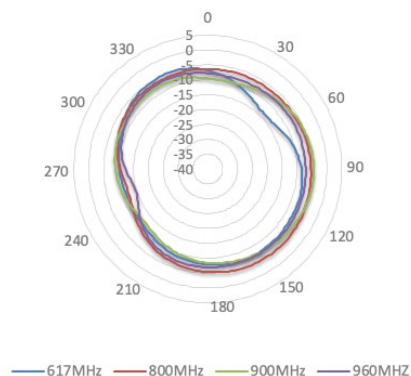


3400-3800 MHz

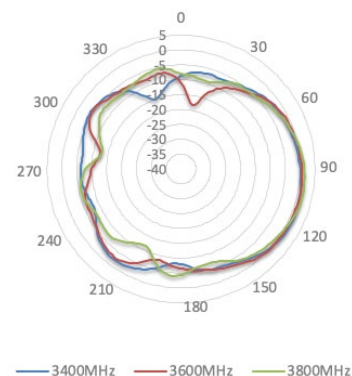


1710-2100MHz

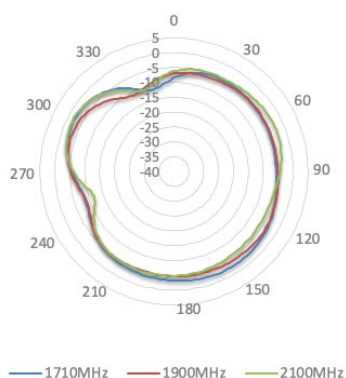


4200-5150 MHz

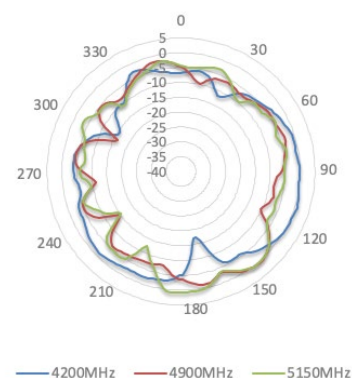

2300-2700 MHz

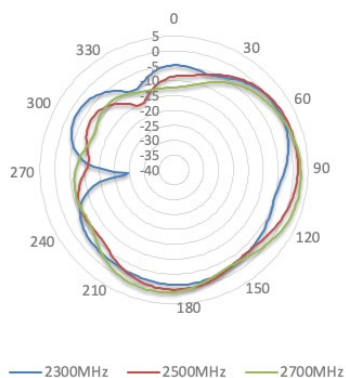


5350-5925 MHz

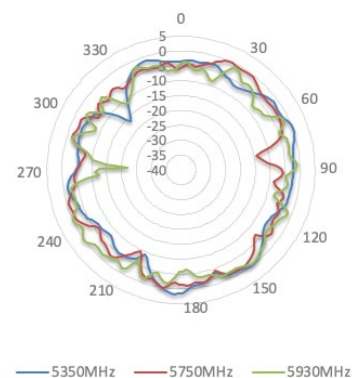


Mobility 40G

## Radiation patterns (Elevation 1)


617-960 MHz

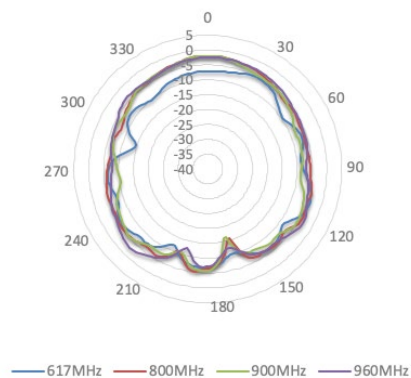


3400-3800 MHz

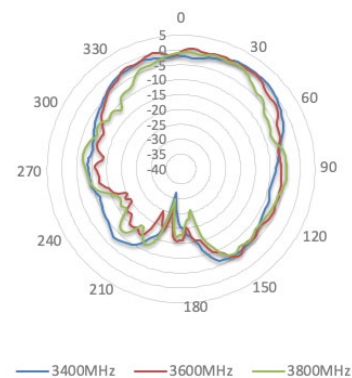


1710-2100MHz

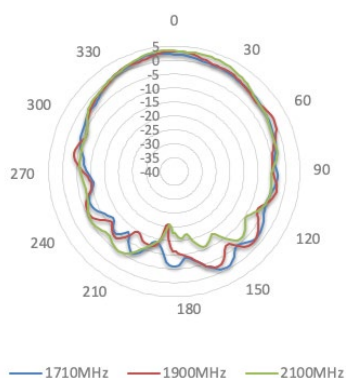


4200-5150 MHz

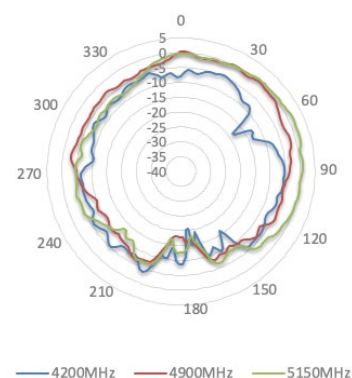

2300-2700 MHz

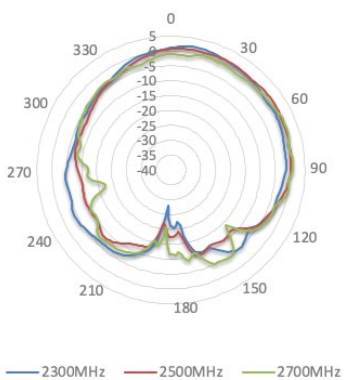


5350-5925 MHz

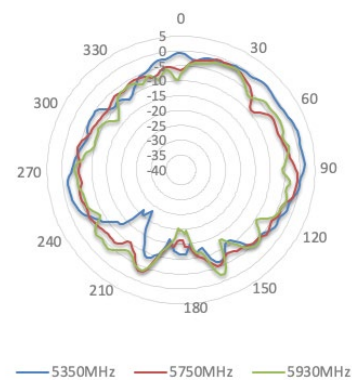


Mobility 40G

## Radiation patterns (Elevation 2)


617-960 MHz

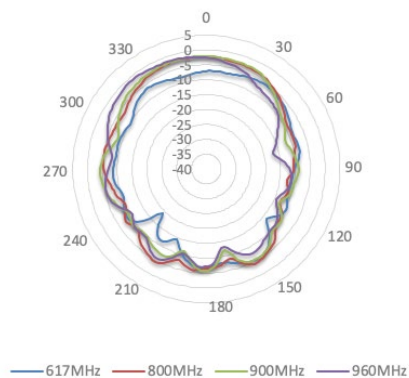


1710-2100MHz

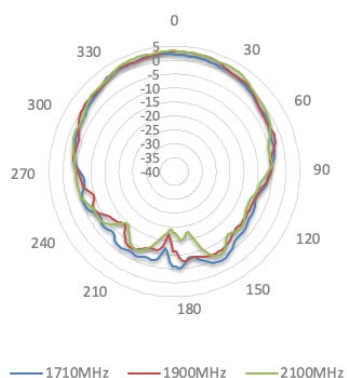


2300-2700 MHz

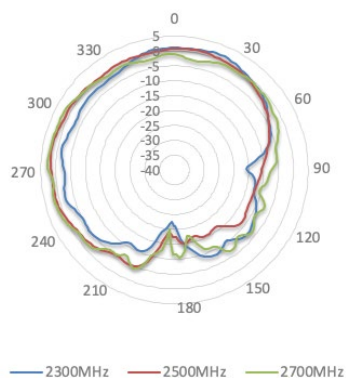


3400-3800 MHz

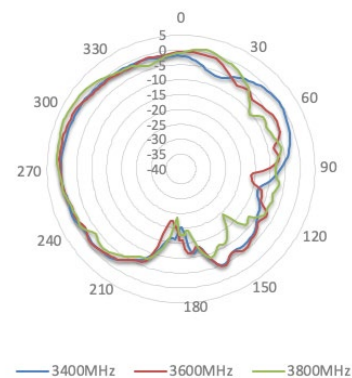

4200-5150 MHz

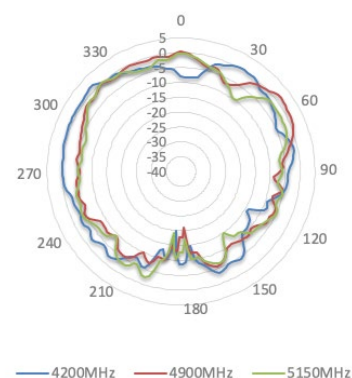


5350-5925 MHz

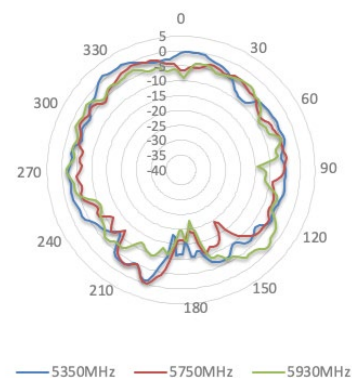


Mobility 40G

## Installation recommendation

### Panel Mount

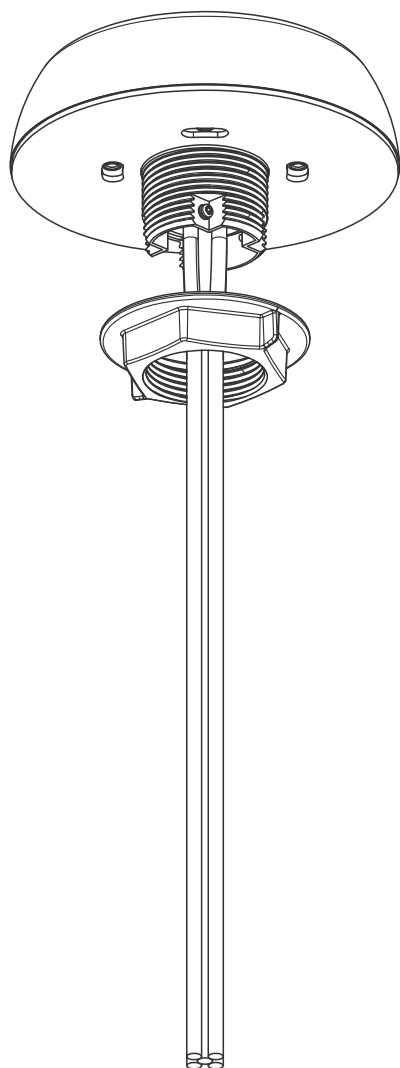

# Mobility 40G

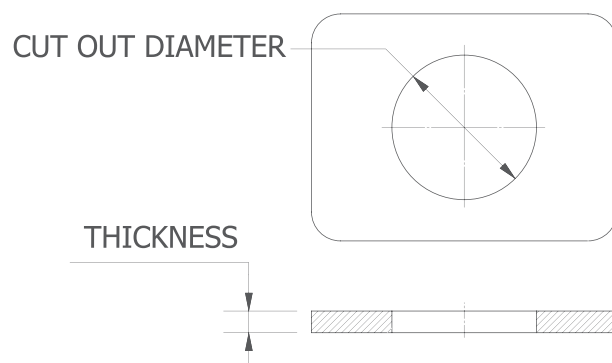


### Notes


- Cover panel surface to protect the paint work. When drilling a hole, start with a small one, then increase it.
- Cut out diameter should be 1 11/16" / 43mm.  
Maximum allowed panel thickness - 15mm.
- After a drill clean up the surface and apply some paint around the hole to prevent corrosion. Attach the antenna.

## Installation recommendation

### Pole Mount

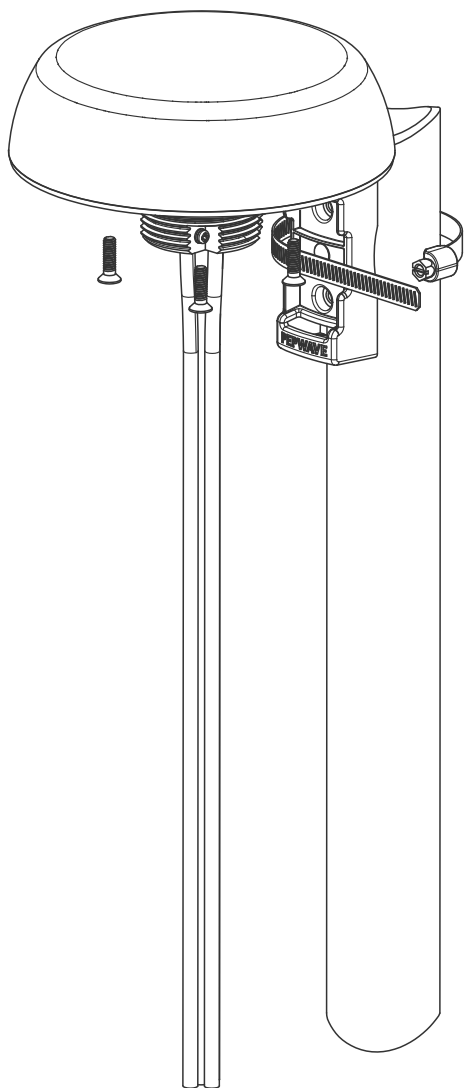


Mobility 40G

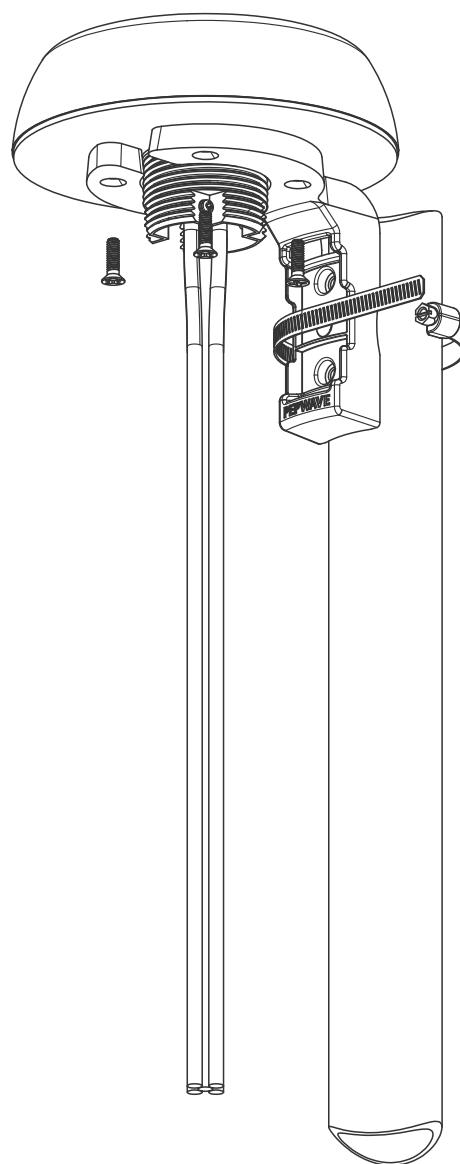


Installation recommendation

Horizontal Pole Mount

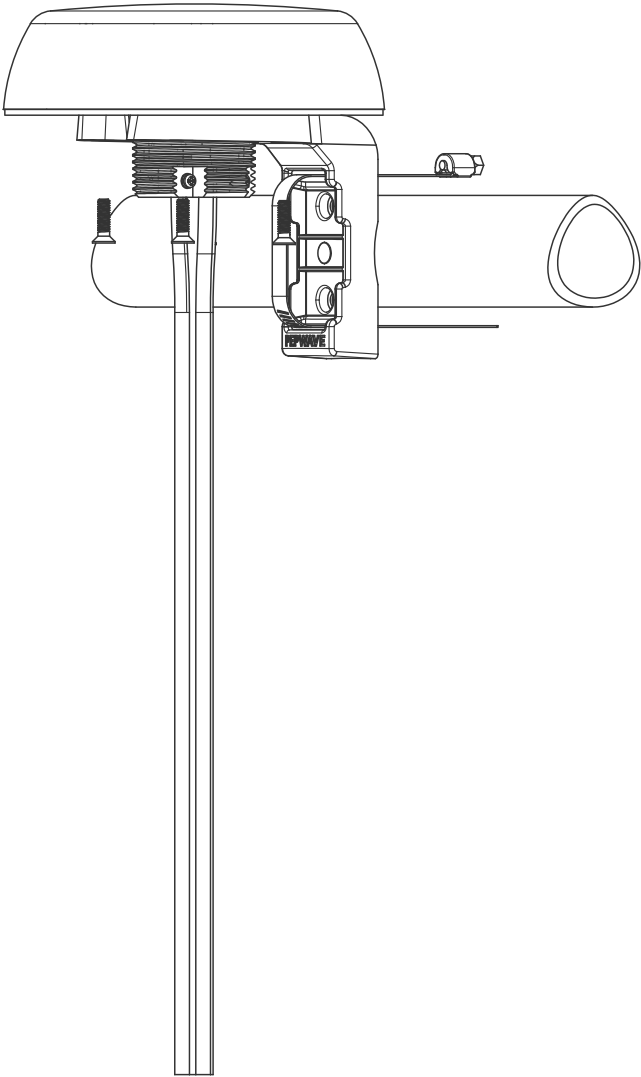

Mobility 40G

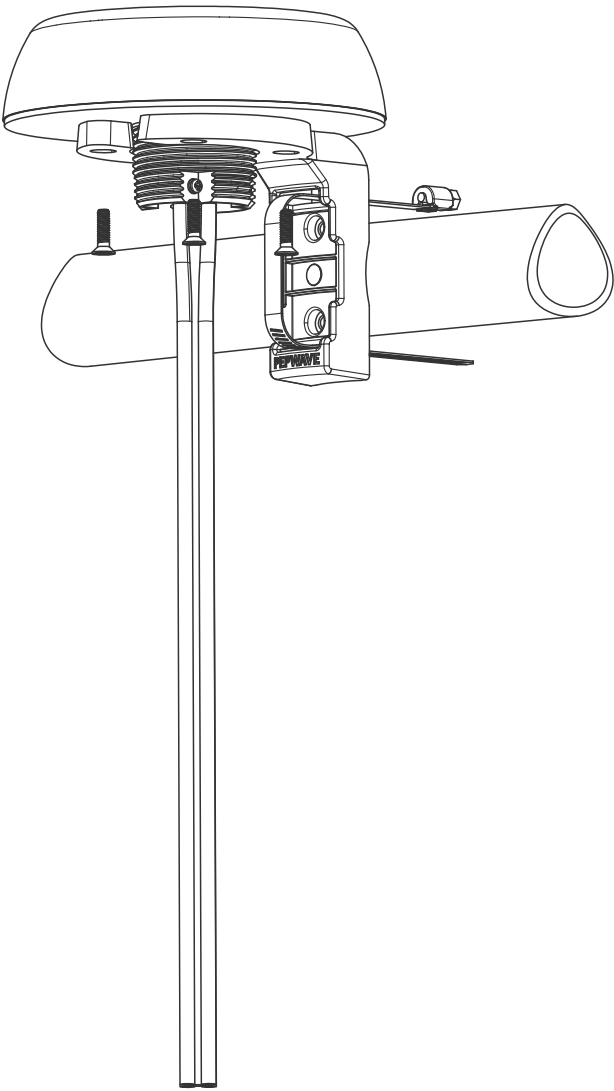

Lorem ipsum dolor sit



## Installation recommendation

Wall Mount

# Mobility 40G

